


DOME CAMERA

DO2 632



- WDR (Long and Short exposure)
- Digital Zoom (x10)
- 1/3" Sony Super HAD II CCD used
- Day and Night Function
- 600 TV Line Resolution
- 0.1Lux at F1.2 (color) / 0.0001Lux (sens-up x256)
- 3DDNR (3D Digital Noise Reduction)
- HLM (High Light Mask)
- IR Light control
- Controlled by OSD Menu
- DC iris control
- Privacy Function
- Motion Detection
- Easy Installation & 3 Axis

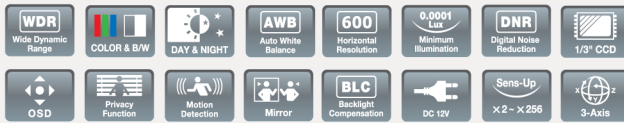

SPECIFICATIONS

Model	63 Model
Resolution	600 TV Lines
Sensor	1/3 inch SONY Super HAD II CCD
Total Pixels	811(H) x 508(V) 410K pixels (NTSC) 795(H) x 595(V) 470K pixels (PAL)
Effective Pixels	768(H) x 494(V) 380K pixels (NTSC) 752(H) x 582(V) 440K pixels (PAL)
Scanning System	2:1 Interlace
S/N (Y signal)	More than 50 dB (AGC off)
Frequency	Horizontal : 15.734KHz / Vertical : 59.94Hz (NTSC) Horizontal : 15.625KHz / Vertical : 50.00Hz (PAL)
Video Output	CVBS : 1.0Vp-p / 75ohm
Min. Illumination	0.1Lux at F1.2 (color) / 0.0001Lux (Sens-up x256)
White Balance	ATW / AWC / PUSH / MANUAL
Electronic shutter speed	Auto / Manual (x256 ~ 1/60 sec ~ 1/120,000 sec NTSC) (x256 ~ 1/50 sec ~ 1/120,000 sec PAL) Sens-up and sens-up limit is selectable / Flickerless
O.S.D	Built-in
Backlight Compensation	Low, Middle, High, HLM, Off Selectable
Gain Control	Low, Middle, High, Off Selectable
3DDNR(3D Digital Noise Reduction)	Low, Middle, High, Off Selectable
Day & Night	Auto / COLOR / BW / CDS
Sens-UP	Auto/Off (Selectable x2 ~x256)
Motion Detection	ON/OFF
PRIVACY	ON/OFF (6 zone)
Mirror	MIRROR / V-FLIP / ROTATE / Off
Digital Zoom	ON (x10) /OFF
WDR (Long and Short exposure)	ON / OFF
SYNC	INTERNAL / AUTO
Operating Temperature/ Humidity	-10℃ ~ +50℃ / 30% ~ 80% RH
Storage Temperature / Humidity	-20℃ ~ +60℃ / 20% ~ 90% RH
POWER	DC12V Only
LENS	Fixed Lens 3.6mm

DIMENSIONS

